




Second Stage Regulator - 25KGH

Product Code: C009A

These products are mainly used as second stage regulators in LPG installations up to 25kg/h (359kW). They can also be used with Natural Gas, SNG, air, nitrogen and other non-aggressive gases. 437 and 3437 models are mainly used in commercial and industrial installations to supply large gas appliances.

Applications

- Strong and reliable design
- Wall-mounting bracket for 3437 models
- Easy pull reset UPSO on 3437 models
- Precise manometers fitted on 1437 models
- Body and cover: die cast zinc alloy
- Diaphragm: NBR
- Valve pad: NBR
- NF certified

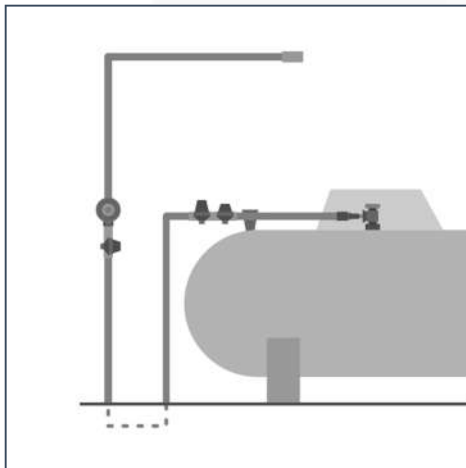

Technical Specifications



Code	Inlet code	Inlet connection	Outlet code	Outlet connection	Inlet pressure (Pu) bar	Outlet pressure (Pd) mbar	Flow rate (LPG)		Flow rate (GN)		UPSO mbar	Pad material	Diaphragm material
							kg/h	kW	m ³ /h	kW			
001077AA	E1E	MAL-G3/4RH	E1E	MAL-G3/4RH	0.125-0.625	29	15	207	---	---	20	NBR	NBR-R
001077AB	E1E	MAL-G3/4RH	E1E	MAL-G3/4RH	0.5-2	37	25	345	---	---	25	NBR	NBR-R
001077AC	E1E	MAL-G3/4RH	E1E	MAL-G3/4RH	0.5-2	148	25	345	---	---	100	NBR	NBR-R

Size:

Packaging: