

Regulator L/P.20KG/HR


Product Code: C213

Mainly used in medium power LPG installations (domestic, commercial or industrial) as final stage or intermediate stage, regulators. Maximum capacity: 30kg/h (414kW). Accurate pressure control. Connectable vent: the vent design allows to drain condensate humidity. For underground or enclosed installations, the vent can also be connected to a pipe (G1/4" thread). Body and cover: die cast aluminum alloy. Diaphragm: NBR-R. Valve pad: NBR or FPM



Applications

- Natural Gas
- LNG
- For special applications they can also be used with other non-aggressive gases (air, nitrogen, bio methane ...)

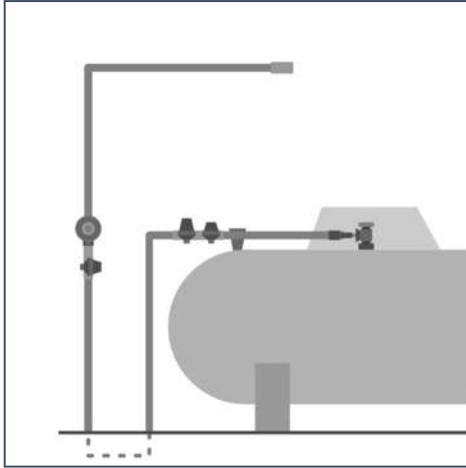

Technical Specifications



Size:
Packaging: