



Gas Detector

Product Code: L0288

GAS DETECTOR GPLR7307B 220VAC COMAP/FRANCE

Code: GPLR7307B

Solenoid: NO

Type of Gas: LPG or SNG

Concentration levels: 1

Single-Master-Slave: Single

Replacement Warning: NO

Bus: NO

Fault Indication: YES


Relay: YES

Alarm Memory: NO



Applications

- These products are installed indoor to prevent against gas leakages.
- Gas detector installation can be done with a "single" detector or by a "master" and several "slave" detectors.

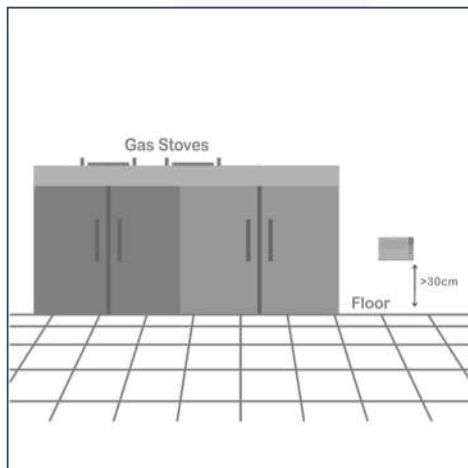

Technical Specifications

Supply voltage	230V (50 or 60 Hz)
Relay contact capacity (if any)	8 (2) A / 250V 6 (2) A/250V when semi-flush mounted
Protection category	IP42 IP40 when semi-flush mounted
Insulation	Double insulation (Class 2)
Operating temperature	-10°C to +40°C
Operation humidity	90% RH max
Alarm level	10% LEL (Lower Explosive Limit)
Sensor warm-up time	1 minute
Sensor life time	5 years
Buzzer sound level	85dB at 1m
Maximum BUS connections (if any)	1 master unit, 14 slave units
Maximum BUS connection length	1km with 2 wires of 1.5mm ² section
Reference standards for CE marking	LVD EN50194, EMC EN 50270, CEI 216-8 (semi-flush mounted)
Maximum BUS connection length	1km with 2 wires of 1.5mm ² section

Size:

Packaging: