




# OLCT10 Gas Detector

**Product Code: L086C**

Designed for use in boiler rooms and parking garages, the OLCT 10 gas monitors give you the most cost-effective solution for the continuous monitoring of toxic in ambient air. Easy to install and operate, these detectors combined with the MX 15 control unit meet demanding user requirements.

## Applications

- Toxic gas monitor
- Fast and accurate response
- ATEX Approval for use in hazardous areas
- IP66

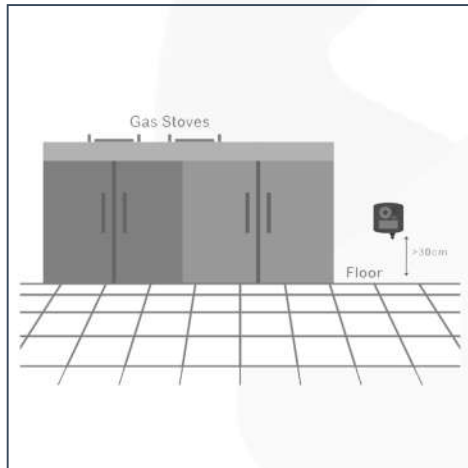

## Technical Specifications



<b>Type</b>	Catalytic bead sensor (pellistor measuring principle)
<b>Size (W x H x D)</b>	118 x 126 x 58 mm
<b>Operating temperature</b>	-10 to + 45 °C
<b>Operating humidity range</b>	0 % RH to 95 % RH
<b>Material</b>	ABS
<b>IP Rating</b>	IP66
<b>Expected lifetime</b>	> 4 years
<b>Operating pressure</b>	80 to 120 kPa
<b>Accuracy</b>	+/- 3% LEL
<b>Response time</b>	T50 < 10s, T90 < 20s

**Size:**

**Packaging:**