




Power Supply Unit 24VDC

Product Code: L214

Altronix AL1024ULX series are power supply/chargers that convert a 115VAC, 60Hz input into a single fused, four (4), eight (8) or sixteen (16) fuse or PTC protected outputs. Outputs are 24VDC with a total of 10A max. Available with 1, 4, 8 or 16 outputs. Fused or PTC protected outputs. Supervision. AC Fail; Battery Fail and Battery Presence. Built-in charger for sealed lead acid or gel type batteries. Instantaneous transfer to stand-by batteries.

Applications

Short circuit and overload protection. AC input and DC output options. UL Listed in the U.S. and Canada. CSFM and MEA Approved. Lifetime Warranty / Made in the U.S.A. All units are available in grey or red enclosure.

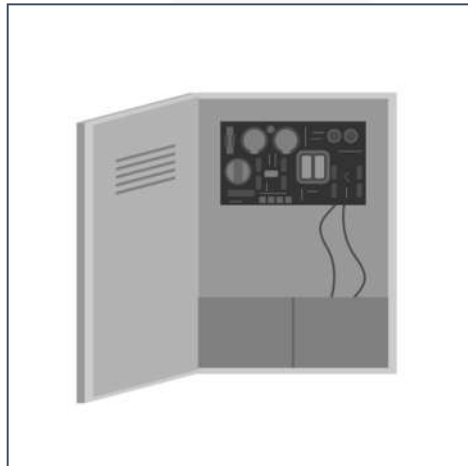

Technical Specifications



Altronix Model Number	Total Output Rating (A)	Input Rating: 115VAC, 60Hz	Input Fuse Rating	Power Supply Output Fuse Rating	Power Distribution Module(s)	Number of Outputs	Class 2 Rated Power Limited Auto Resettable Output(s)	Fused Outputs Ratings	PTC Outputs Ratings
AL1024ULX	10A	4.2A	5A/250V	15A/32V	--	1	--	10A	--
AL1024ULX PD4					PD4UL	4	--	3.5A	--
AL1024ULX PD4CB					PD4ULCB	4	✓	--	2.5A
AL1024ULX PD8					PD8UL	8	--	3.5A	--
AL1024ULX PD8CB					PD8ULCB	8	✓	--	2.5A
AL1024ULX PD16					Two (2) PD8UL	16	--	3.5A	--
AL1024ULX PD16CB					Two (2) PD8ULCB	16	✓	--	2.5A

Size:

Packaging: